


HSF



ROHS

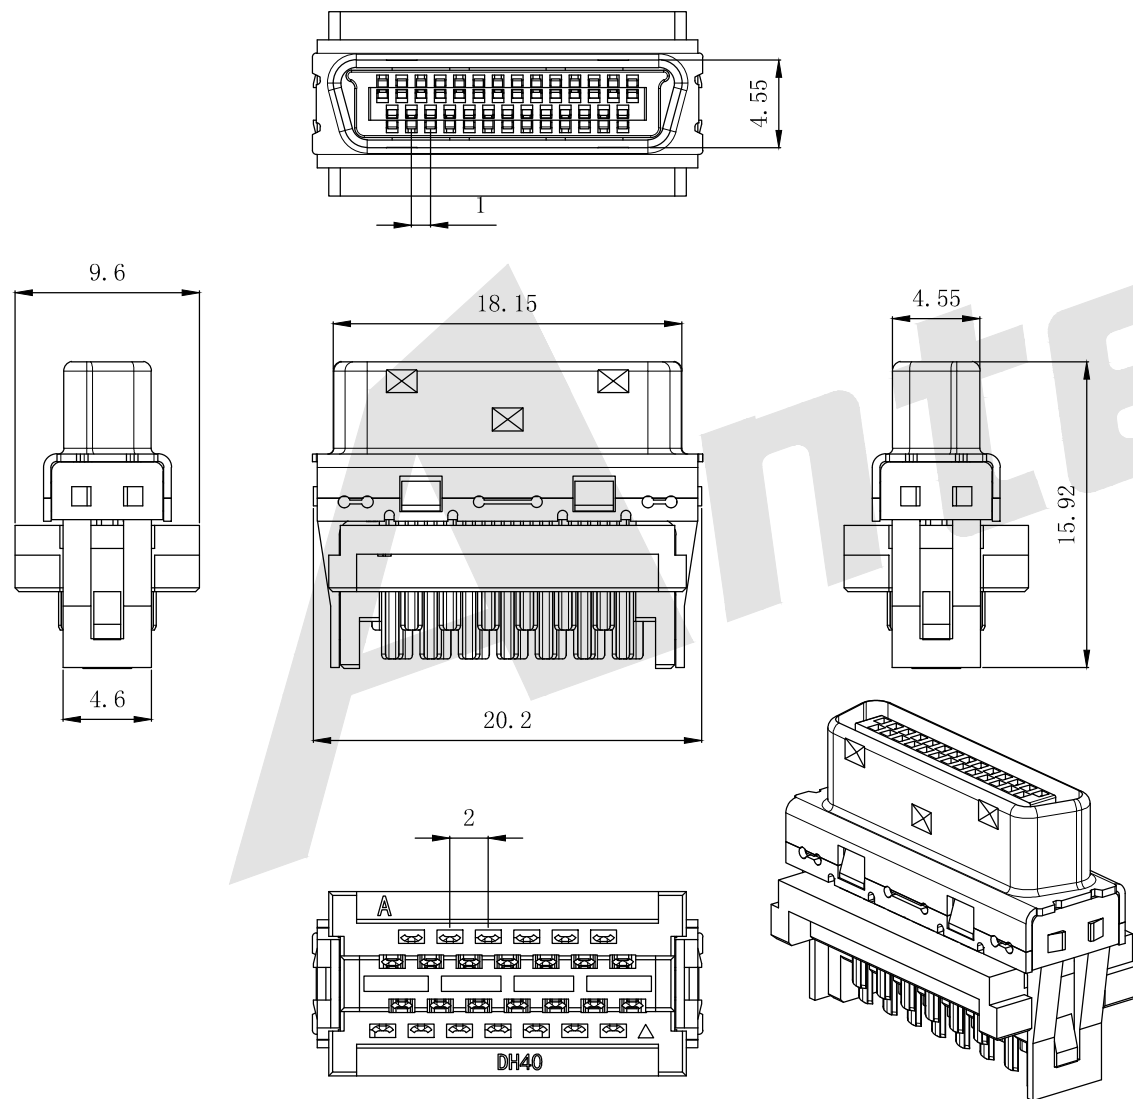

SPECIFICATIONS:

1. Electrical Characteristics:

- 1.1 Contact Current Rate: 1AMP
- 1.2 Insulation Resistance: 500M Ω Minimum
- 1.3 Contact Resistance: 35M Ω Maximum
- 1.4 Dielectric Voltage: 500V AC For One Minute
- 1.5 Operation Temperature: -55° C To +105° C

2. Material:

- 2.1 Insulator: PBT UL94V-0 Black
- 2.2 Contact: Phosphor Bronze, Gold Selective Plated
- 2.3 Front Shell: Steel Nickel Plated Over Copper

Ordering Code:

HPCNS - X - M - 27 - X
① ② ③ ④ ⑤

① Series No:


② Contact Type:
M: Male

③ Pitch: 100:1.00MM

④ Contact NO.:
27=27P⑤ Contact Plating:
S0: Gold Flash Selective Plating
S2: 5u" Gold Selective Plating
S4: 15u" Gold Selective Plating
S5: 30u" Gold Selective Plating

Unless Otherwise specified tolerance
X. ± 0.35 X.XX: ± 0.20
X.X: ± 0.25 X.XXX: ± 0.15

SCALE:
As Shown
DRAW
Jack Bao
CHECK
Bob Yang



3rd ANGLE PROJECTION

UNIT:
mm
DATE
8/27/2018
DATE
8/27/2018



ANTENK ELECTRONICS CO., LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE:
1.00mm Series 27P Cable Plug
Connector Solder Molded Ribbon Type

DRAWING NO: HPCNS-M27X

PRODUCT NO: HPCNS-M27X

REV

DESCRIPTION

DATE

1

2

3

4

5

6

7

8